

CFAGME10 Series

AC-DC module converter

电力专用电源



典型性能 FEATURES

- ◆ 10瓦功率输出 (10 Watts of Output Power)
- ◆ 单、双路输出 (Single、Dual、Outputs)
- ◆ 高电压输入 100Vac-460Vac (Wide Input Range)
- ◆ 高隔离电压 (3000Vac Isolation)
- ◆ 小型化封装 (Small Package)
- ◆ PCB、导轨式安装方式

电气特性


ELECTRICAL SPECIFICATIONS

输入特性Input		Min	Nom	Max		
输入电压Vac Input Voltage	100(150Vdc)	380		460(650Vdc)		
输入频率Hz Input Frequency	45			65		
输出特性Output						
输出电压精度 Setpoint Accuracy		±1%			Vo1	
		±3%			Vo2、Vo3	
源效应 Line Regulation				±0.2%		
负载效应 Load Regulation				±0.5%		
纹波与噪声 Ripple and Noise				50mVp-p 100mVp-p 200mVp-p	Vo≤5Vdc Other Vo≥48Vdc	
温度系数 Temperature Coefficient		±0.1%/℃				
综合特性General						
隔离电压 Isolation Voltage				3000Vac/1min/5mA 1500Vac/1min/5mA 500Vac/1min/5mA	Input-Output Input-Case Output- Case	
开关频率 Switching Frequency	60KHz			100KHz		
MTBF		3×10 ⁶ h				
工作环境温度（满载不降额） Storage Temperature	-25℃ -40℃ -40℃			+55℃ +70℃ +70℃	Industry Military GS Military PJ	工业级 军品筛选级 普军级
储存温度 Storage Temperature	-55℃			+125℃		
相对湿度 Relative Humidity	10%			90%		
短路保护 Short-Circuit Protection	短路自恢复 Continuous, Automatic Recovery					

		输入电压(Vac) Input Voltage	输出电压(Vdc) Output Voltage Vo1/Vo2/Vo3	输出电流(A) Output Current Io1/Io2/Io3	效率 Efficiency
单路	CFAGME10S05(Z)	100~460	5	2	78%
	CFAGME10S12(Z)	100~460	12	0.83	81%
	CFAGME10S15(Z)	100~460	15	0.66	81%
	CFAGME10S24(Z)	100~460	24	0.42	81%
双路	CFAGME10D05(Z)	100~460	+5.05/-5.05	+1/-1	79%
	CFAGME10D12(Z)	100~460	+12/-12	+0.42/-0.42	81%
	CFAGME10D15(Z)	100~460	+15/-15	+0.33/-0.33	81%
	CFAGME10D24(Z)	100~460	+24/-24	+0.21/-0.21	81%
	CFAGME10D05-05I(Z)	100~460	+5.05/-5.05	+1.6/-0.4	81%
	CFAGME10D05-12I(Z)	100~460	+5/+12	+1.1/-0.4	81%
	CFAGME10D05-24I(Z)	100~460	+5/+24	+1.1/-0.2	81%



注: I:代表输出隔离 Z:代表带转接底座, 可选配

温度/功率降额曲线

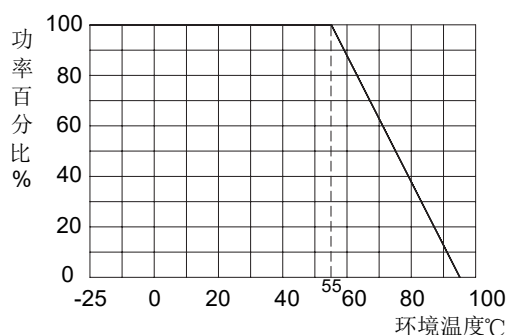

机械图及管脚说明

(MECHANICAL CHART、PINS) (Unit: mm/ inch)

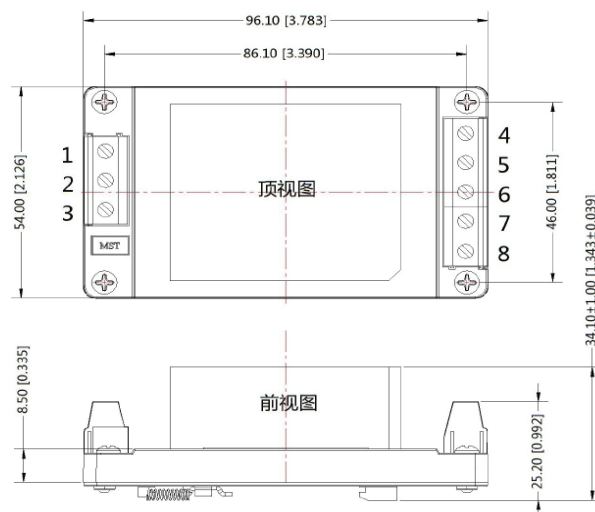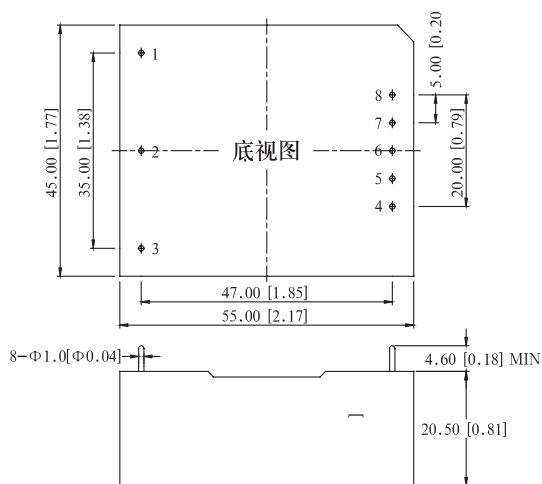

管脚	Pin	1	2	3	4	5	6	7	8
单路	Single	L	N	FG	-Vo	NP	NP	NP	+Vo
均载双路	Balance load Dual	L	N	FG	-Vo2	NP	COM	NP	+Vo1
非均载双路	Imbalance load Dual	L	N	FG	-Vo1	+Vo1	NC	-Vo2	+Vo2